

V15PW

Technical Specifications



Product Description

The **V15PW-US** Pop Up Outlet is a premium gas-strut operated solution designed for the U.S. market. With a simple press on the top, the outlet smoothly rises for use; push it down again, and it retracts seamlessly back into the countertop. The gas-strut mechanism operates similarly to the height adjustment of an office chair, providing smooth and effortless movement.

Features

- ✓ 6-Foot Cable with **US Fitted Plug**
- ✓ 4x US Power Outlets
- ✓ 3.15" Inch or 80mm Hole Size Diameter
- ✓ Gas-Strut Automatic Raising Mechanism



Technical Specifications

Model: V15PW-US
Country: United States
Color: White
Materials: PC
Warranty: 24 months
Installation Hole Diameter: 3.15" Inch or 80mm
Space Below Surface: 9" (in) depth
Lifting Method: Gas Strut
Available Stock: Missouri, MO
Outlets: 4x US Outlets
Box Dimensions: 17.5 x 35 x 15 cm
Weight: 1.5kg

Electrical

Cable Length: 6-Foot or 1.8m
Cable Type: US Type
15A 125VAC 60Hz 1875W MAX
Plug: US Type
Degree of Protection: IP20
Rated Voltage: 125VAC
Rated Current: 15A
Operating Temperature: 0 - 40 C, 32 - 104 F

Other Options:	Model	Country	Features
	V15PWUW-US	US	Four US Sockets, Wireless Charging, USB-A, USB-C
	V15PW-US	US	Four US Sockets

Installation

Step 1: Bench-top hole: drill a hole in your bench-top, with the diameter according to the product specifications.

Step 2: Unscrew the locking ring around the body of the unit, and remove it altogether.

Step 3: Place the unit inside the hole in your bench-top.


Step 4: Screw back the locking ring around the body of the unit - from the underside of the bench-top, and tighten it securely.

Step 5: Connect the unit to power by plugging it into a power outlet under the bench-top.

Support

mail: contact@modernpower.solutions web: modernpower.solutions

3.15" or 80mm Hole Diameter

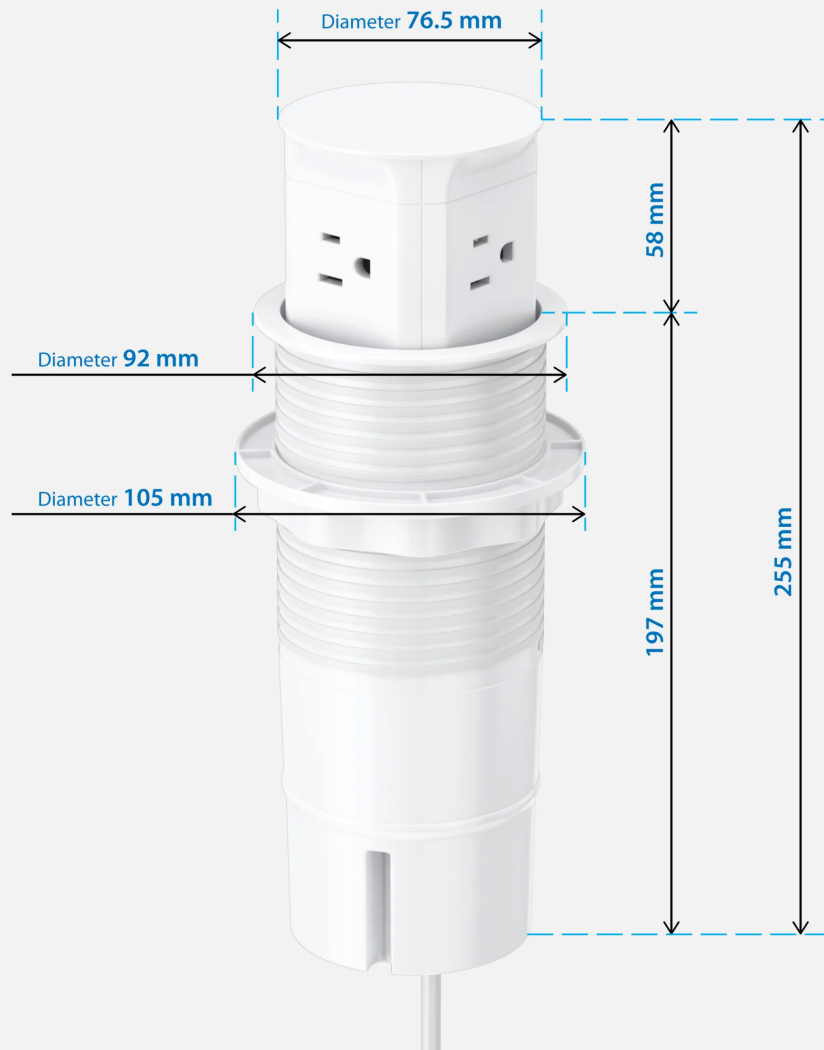

Frequently Asked Questions

FAQs

Q. Is this model spring-loaded? Does it automatically come up?

A. Yes, this model uses a gas strut to open automatically. Simply push down on the top of the unit, and it will raise up, ready to use.

Q. Can this model be installed in the upside-down or sideways position?

A. This model can be installed in the standard upright or sideways position. It is not designed for upside-down installation.

Q. What happens if I have an issue with my product after the warranty period?

A. We've designed and tested these units for use over many years withstanding in a normal environment. If your product does develop an issue outside of the warranty period, we do provide an affordable repair or replacement service.

Q. Do you provide an after sales-service, and how do I contact you?

A. Yes, we provide an after-sales service. You can contact us via phone – through our ‘request a call back’ feature, where you give us your name and phone number, and we ring you back as soon as possible.

Q. Do I need a licensed electrician to install this product?

A. No, no electrical work is needed to install this product. We have designed the unit with a plug, allowing you to plug the unit into any other power socket – below your installation surface.

Q. What is the process in making a warranty claim if I have an issue with my product?

A. If your product malfunctions within the warranty period, we will repair or replace it free of charge. We keep digital records matched with product serial numbers for every order, so you do not need to worry about keeping your receipt.

About Modern Power Solutions

Modern Power Solutions is the leading manufacturer for retractable, pop up power sockets designed for the home and office. Founded in 2006, Modern Power Solutions aims to improve the convenience of power access through product innovation, customer research and a culture of microfocus.

Disclaimer

Modern Power Solutions has made every attempt to ensure the accuracy and reliability of the information provided in this document are correct. All information contained in this document is to be used for general guidance only. Modern Power Solutions reserves the right to change, delete or modify the information without notice.

© Modern Power Solutions (Last Updated 28th July 2025)